



The system requires several electronic components, including input, processor, and output components. The input sensors consist of the Capacitive Soil Moisture Sensor, BME280, and Negative Thermistor Coefficient (NTC). The Capacitive Soil Moisture Sensor measures the moisture level or water content of the grain. The BME280 sensor measures the ambient temperature of the Bed Dryer, while the NTC sensor measures the room temperature.

To achieve real-time monitoring of measurement results that can be used by farmers, an Internet of Things (IoT) based monitoring tool is proposed. The ESP32 series NodeMCU microcontroller will be used for data processing, and the information output will be displayed on a 16x2 LCD. The aim is to improve the accuracy of grain moisture content monitoring by obtaining real-time data. Apart from that, assisting farmers in determining the optimal dryness level will increase the quantity and quality of the grain produced.

## II. METHOD

This section explains the design thinking method, which consists of five stages: empathize, define, ideate, prototype, and testing (see Fig. 1).

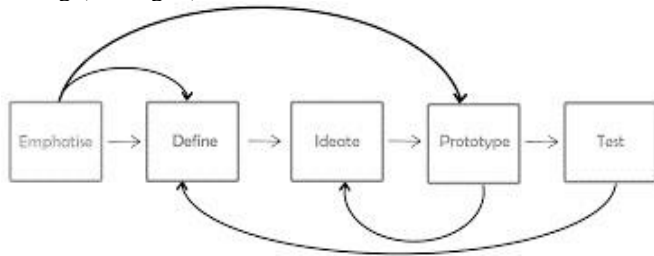


Fig. 1 Stages of design thinking

### A. *Empathise*

During this stage, observations were made on the challenges farmers face when monitoring grain moisture content. Empathy activities were conducted at Sri Makmur, a Farmer Group Association (Gapoktan) located in Krasak Village, Jatibarang District, Indramayu Regency.

### B. *Define*

Based on the observed data, we analyze and synthesize to identify core problems. However, the process of monitoring grain moisture content remains conventional, involving cutting or biting the grain.

### C. *Ideate*

At this stage, we generate ideas to offer solutions to the problems faced by farmers. We propose a tool design that monitors grain moisture content in real-time using Internet of Things (IoT) technology. The design includes several features to address the issues that arise in monitoring grain moisture levels.

### D. *Prototype*

At this stage we created a prototype of an automatic monitoring tool as follows:

- Design of tool prototype dimensions,
- Design of automatic control systems,
- Integration of IoT tool communication to the server,
- Sustainable prototype operational design.

### E. *Testing*

Testing was conducted with the Sri Makmur farmer group to evaluate the effectiveness of a tool for monitoring grain moisture levels. The tool was tested by measuring the water content of samples of wet grain or Harvested Dry Grain (GKP) and comparing it with Milled Dry Grain (GKG). This test served as a parameter for determining the tool's quality and readiness for implementation in the community. The test results yield the grain's moisture content value and temperature in Celsius, displayed on the LCD screen.

## III. RESULT AND DISCUSSION

This section describes the tool, outlines the stages of its creation, explains its functionality, and provides instructions for installation.

### A. *Tool Description*

This tool proposes a solution for monitoring rice seeds or grain, which is currently done manually through biting. This tool aims to mitigate issues related to excessive water content or overly dry grain. It utilizes an Internet of Things-based system that is integrated with a data storage server, providing farmers and local grain producers with real-time monitoring data. Fig. 2 shows the 3-dimensional model of the tool.

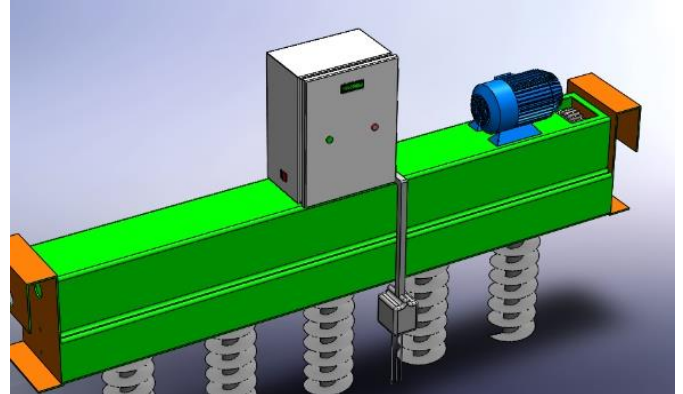


Fig. 2 The 3-dimensional model

### B. *Tool Development Stages*

This section explains the supporting components utilized in the preparation of IoT tools.

1) *Node MCU ESP32*: The ESP32 is a low-power system on chip (SoC) series that features dual-mode Wi-Fi and Bluetooth capabilities. It is equipped with a dual-core or single-core Tensilica Xtensa LX6 microprocessor that can reach a clock rate of up to 240 MHz. Additionally, the ESP32 is integrated with built-in antenna switches, RF balun, power amplifier, low noise receives amplifier, filters, and power management modules. This SoC is the successor to the ESP8266, which is widely used for IoT applications. According

to Suharjo I (2020), the ESP32 features a CPU core, faster Wi-Fi, more GPIOs, and Bluetooth Low Energy support.

2) *Soil Moisture Sensor*: The Soil Moisture Sensor is a module designed to detect moisture in grain. It can be accessed using a microcontroller such as NodeMCU. Therefore, a higher resistance value indicates a higher moisture level. The sensor measures humidity by passing an electric current through the grain and then reading the resistance value to determine the moisture level. The resistance value increases with the amount of water in the grain.

3) *Sensor BME280*: The BME280 is an environmental sensor that measures temperature, humidity, and air pressure. The temperature sensor provides accurate measurements of environmental temperature with a precision of up to  $\pm 1^\circ\text{C}$ . The humidity sensors provide measurements of humidity with a precision of  $\pm 3\%$ . Pressure sensors are utilized to measure atmospheric pressure with an accuracy of up to  $\pm 1$  hPa.

4) *Sensor NTC*: Negative Temperature Coefficient, is a type of thermistor that experiences a change in resistance based on temperature. Specifically, the resistance of an NTC decreases as the temperature increases. Therefore, the hotter the NTC becomes, the lower its resistance.

5) *Step Down 5v MP1584*: The MP1584 is a voltage regulator module used to step down input voltage to a lower output voltage. It is commonly utilized in electronic circuits requiring a stable and constant DC voltage, such as microcontroller circuits, sensor modules, and power supply circuits for other electronic devices.

### C. Tool Operation

The system for monitoring grain moisture levels using IoT sensors involves interconnecting sensors that measure the moisture content or dryness level of stored grain. The data collected by the sensors is transmitted through an IoT network to a server-connected platform where it is processed using appropriate algorithms to calculate the actual humidity levels. The flowchart of the tool operation is shown in Fig. 3.

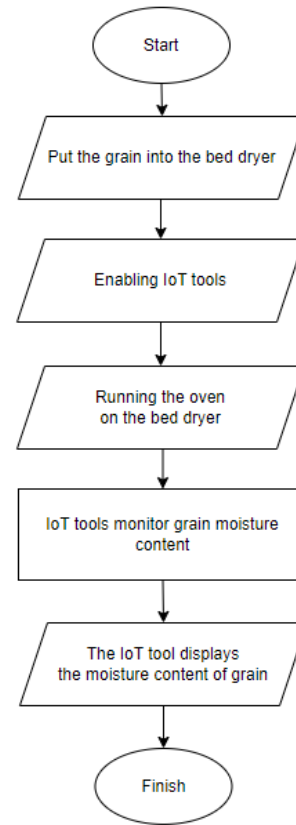


Fig. 3 Flowchart of IoT tool

### D. Tool Installation Guide

To measure an object, place the probe directly on it and activate the tool by pressing the ON switch on the panel. The sensor will then start taking measurement values of objects within its range, and the LCD will continuously display the results of water content readings. The indicator light will provide a message regarding the grain measurement results. The green light is for dry grain, while the red light is for wet grain. The IoT tool has two lights to indicate the moisture content of grain. The tool also sends the moisture content data to the server for monitoring on an LCD display. It is important to ensure that the tool is connected to the internet for this feature to work. The illustration of installation shown in Fig. 4.

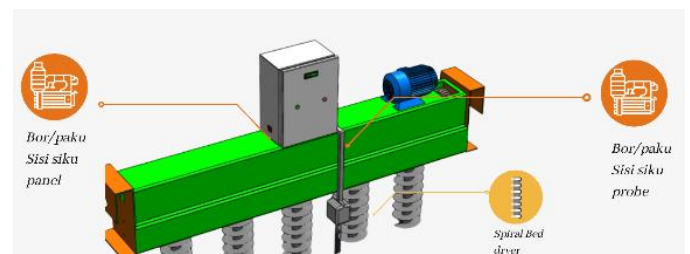


Fig. 4 Tool installation

#### IV. CONCLUSIONS

This tool could benefit from integration with web and mobile applications that provide users with measurement value data. Additionally, data obtained from IoT tools can be used as input for machine learning to predict the duration of grain drying time needed to achieve ideal moisture content. The tool's development has progressed to the point of sending value data to the database server. However, to make the tool available to users, it needs to be integrated with websites and mobile applications.

#### ACKNOWLEDGMENT

This research requires support from various parties to achieve maximum results. We express our gratitude to Gapoktan Sri Makmur for providing us with the opportunity to obtain data and simulations. Additionally, we thank the research and community service unit of the Indramayu State Polytechnic for facilitating this research activity. The authors express gratitude to the research team from Diponegoro University, specifically Mr. Budi and Mrs. Okki, for their assistance throughout the research process. Objective evaluations are appreciated to improve this tool in the future.

#### REFERENCES

- [1] [bbp2tp.litbang.pertanian.go.id](http://bbp2tp.litbang.pertanian.go.id). (n.d.). SNI 6128:2020 TENTANG BERAS. Retrieved February 23, 2023, from <http://bbp2tp.litbang.pertanian.go.id/index.php/berita/berita-teknologi/1913-sni-6128-2020-tentang-beras>.
- [2] BPS. (2023). Kabupaten Indramayu Dalam Angka 2023 (Iqbal Muhammad, Ed.). BPS Kabupaten INDRAMAYU.
- [3] Gunawan I Ketut Wahyu, & Bella Cinthya. (2021). Pemantauan Kelembaban Padi dengan Memanfaatkan Sensor Kelembaban Berbasis Mikrokontroler. *Jurnal Portal Data*, 1(3).
- [4] [9] Hidayati Noor, Ratnawati P Diah Utami, & Suherman. (2013). PENERAPAN TEKNOLOGI FLUIDIZED BED DRYER DENGAN PENAMBAHAN ZEOLIT 3A UNTUK MENINGKATKAN EFISIENSI PENGERINGAN GABAH. *Jurnal Teknologi Kimia Dan Industri*, 2(4), 65–71. <http://ejournal-s1.undip.ac.id/index.php/jtki>
- [5] Lubis, A., Fakultas, D., Dan, E., Islam, B., & Padangsidempuan, I. (n.d.). PENINGKATAN KINERJA MELALUI STRATEGI BENCHMARKING.
- [6] Rasmikayati, E., Saefudin, B. R., Rochdiani, D., & Natawidjaja, R. S. (2020). Dinamika Respon Mitigasi Petani Padi di Jawa Barat dalam Menghadapi Dampak Perubahan Iklim serta Kaitannya dengan Pendapatan Usaha Tani. *Jurnal Wilayah Dan Lingkungan*, 8(3), 247–260. <https://doi.org/10.14710/jwl.8.3.247-260>
- [7] Rusmono Momon, & Aminudin. (2022). Pola Konfigurasi Mesin dan Rendemen Penggilingan di Usaha Penggilingan Padi Kecil (PPK) Studi Kasus di Provinsi Jawa Barat. *Jurnal Pangan*, 31(3), 217–232.
- [8] Sarastuti, Usman Ahmad, & Sutrisno. (2018). Penerapan GHP dan GMP pada Penanganan Pascapanen Padi di Tingkat Penggilingan. *JURNAL PANGAN*, 27(2), 79–96.
- [9] Subikha Ikha, Santoso Teguh Iman, & Karto. (2022). Strategi Pemasaran Beras (*Oryza sativa*, L.) Organik Pada Kelompok Tani. *Jurnal Agribisnis*, 14(1), 16–25.
- [10] Tefa, A. (2017). Uji Viabilitas dan Vigor Benih Padi (*Oryza sativa*, L.) selama Penyimpanan pada Tingkat Kadar Air yang Berbeda. *Savana Cendana*, 2(3), 48–50.